


P12-1-X



Rating / Schaltleistung: 3A 250VAC
Contact Resistance / Kontaktwiderstand: 50mΩ MAX
Insulation Resistance / Isolationswiderstand: 100MΩ 500VDC
Dielectric Strength / Spannungsfestigkeit: 1000VAC rms.
Electrical Life / Elektronische Lebensdauer: 100,000 Operations
Operating Temperature / Betriebstemperatur: -25 °C - +55 °C
Protection Grade / Schutzklasse: IP67
Soldering / Löttemperatur: 300°C max. for 5 seconds
Material:
Body / Gehäuse: Stainless Steel 304
Terminal / Anschluss: Solder Terminal

Lampenart /	Lamp Type	LED lamp (AC/DC)
Nennspannung /	Rated Voltage	6-24VAC/DC
LED Farbe /	LED Color	R G Y B W
Lebensdauer /	Life	40000hours
Schaltbild /	Lamp Circuit Diagram	

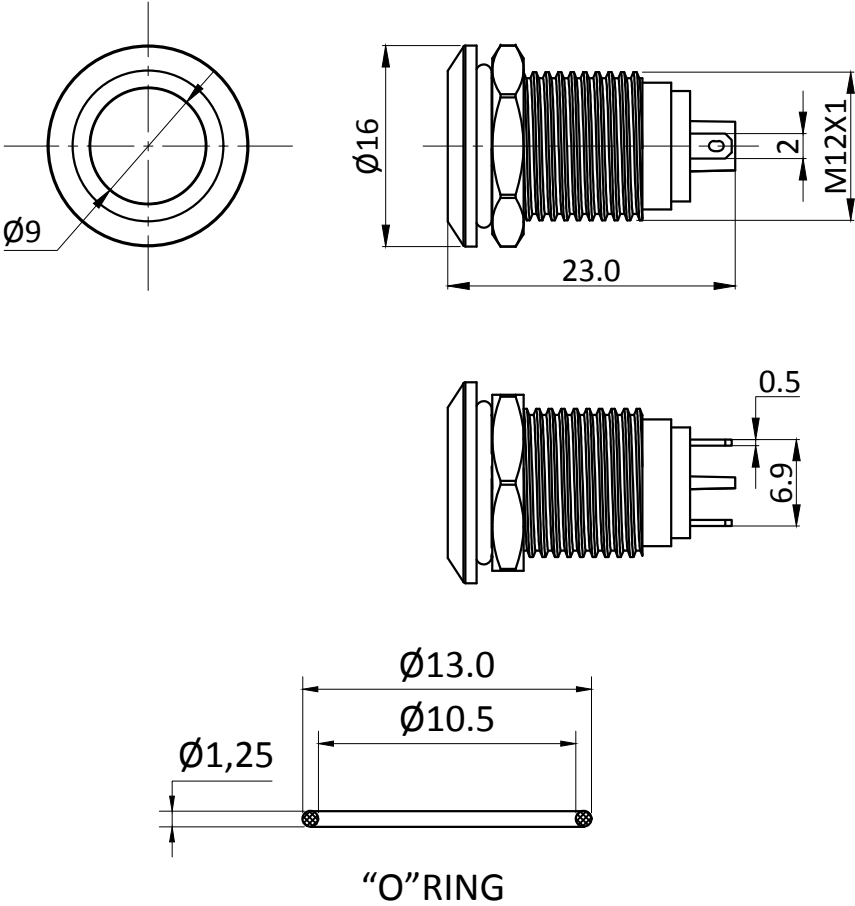