

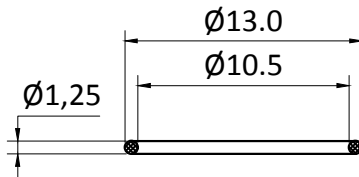
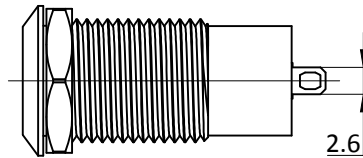




# P12-RF

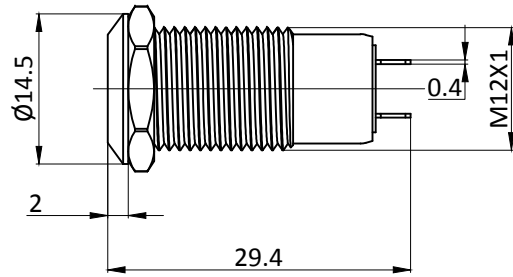

“O”RING



Kontaktart



Install size / Bohrbild

Rating / Schaltleistung: 3A 250VAC

Contact Resistance / Kontaktwiderstand: 50mΩ MAX

Insulation Resistance / Isolationswiderstand: 100Ω min at 500VDC

Dielectric Strength / Spannungsfestigkeit: 1000VAC rms.

Electrical Life / Elektronische Lebensdauer: 100,000 Operations

Operating Temperature / Betriebstemperatur: -25 °C - +55 °C

Operating Pressure / Betätigungsdruck: 2 N ~ 5 N

Operating Stroke / Hub: 1.0mm~6.0mm

Protection Grade / Schutzklasse: IP67

Soldering / Löttemperatur: 300°C max. for 5 seconds

Function / Funktion: OFF (ON)

Material:

Body / Gehäuse: Stainless Steel 304

Button / Drucktaste: Stainless Steel 316

Terminal / Anschluss: Solder Terminal
