



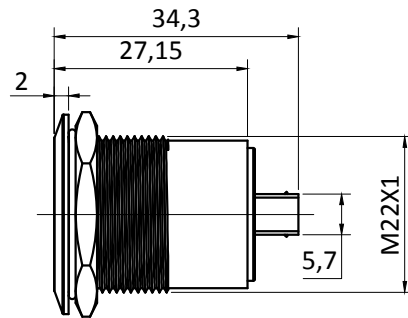
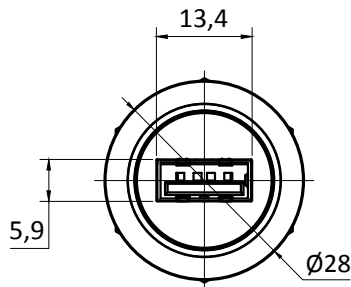


# C22-USB3



“O”RING



Install size / Bohrbild

USB interface specification:  
 Contact current Rating:  
 1.8 Amperes for pin1&pin4.  
 0.25 Amperes other contacts  
 Dielectric Withstanding Voltage:AC 100V (RMS)  
 Insulation resistance:100Megohms Minimum.  
 Contact Resistance:  
 30mΩ Max for pin1&pin4  
 50mΩMax for other contacts  
 Mechanical Characteristics:  
 Mating Force:35 Newtons. Maximum  
 Unmating Force:10 Newtons. Minimum.  
 8N Min After Durability

MATERIAL:  
 Housing: SEE TABLE, UL94V-0  
 Contact:2.0 Contacts C5191  
 3.0 Contacts C2680  
 Shell:BRASS/SPCC  
 PLATING:  
 Contact: Au Plated on contact area  
 Fog Tin 100u”Min Plated on solder area  
 Nickel 50u”Min underplating over all.  
 Shell: Nickel 50u”Min underplating over all.  
 Gold 0.5u” minimum gilding  
 operating Temperature:-25 ° C - +55 ° C  
 Soldering / Löttemperatur: 300° C max. for 5 seconds  
 Material:  
 Body / Gehäuse: Stainless Steel 304
